

# PANZERI

## Lampyris

220-240V AC ON-OFF  
ET08044.000.0101

● metallized brown



### Data sheet


CODE	ET08044.000.0101
SYSTEM POWER CONSUMPTION	9W
EFFICACY	55.56lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>80
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1000lm
LUMEN OUTPUT	500lm
EFFICIENCY	50%
WEIGHT	4,44 Kg
PROTECTION DEGREE	IP65
COLOUR TOLLERANCES	SDCM 3
SHOCK RESISTANCE RATING	IK09
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	20,0 x 62,0 x 44,0 cm



Lighting fixture for in-ground installation in outdoor spaces, with direct light emission.  
Aluminium bearing base in polyacrylic paint.  
Pickled sheet metal layers for ground retention.  
Die-cast aluminium structure in polyacrylic paint.  
Aluminium dissipation plate.  
Modelled polycarbonate diffuser with opaline finish.  
EPDM rubber gasket.  
Closing frame in die-cast aluminium in metallized brown polyacrylic paint.  
Nylon PG9 cable gland for H05RN-F o H07RN-F input cables with Ø 4-8mm (Ø 0,2-0,3").



### Technical drawing

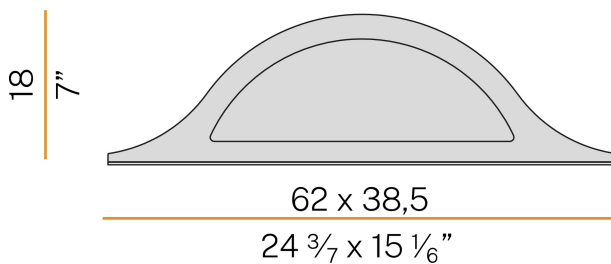

### Polar diagram

