

Zig Zag


220-240V AC dimmable (DALI/Push DIM)
L04334.100.0402

 micaceous grey




Data sheet

CODE	L04334.100.0402
SYSTEM POWER CONSUMPTION	50W
EFFICACY	63.86lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4560lm
LUMEN OUTPUT	3193lm
EFFICIENCY	70%
GLARE RATING	UGR < 19
WEIGHT	8,65 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	20,0 x 32,0 x 110,0 cm

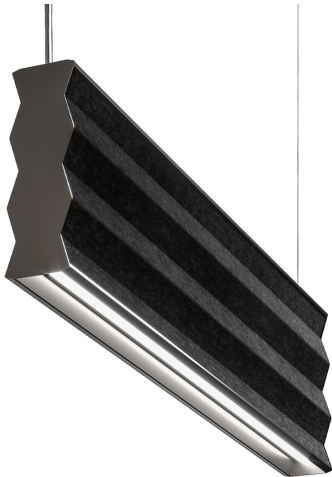

Suspension lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium and pickled sheet metal structure in micaceous grey polyacrylic paint. Extruded aluminium reflectors in powder paint. Extruded polycarbonate diffusers micro-prismatic for direct light and with opaline finish for indirect light. Sound absorbing PET covers in charcoal colour with sound absorption Class C for reducing up to 70% of reverberated sound (NRC 0,7) and fire rating Group 1 ISO 9705. Pickled sheet metal end caps in polyacrylic paint. Suspension kit with griplocks and 2m (78,7") long steel cables. 2,2m (86,6") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in micaceous grey polyacrylic paint.

Technical drawing

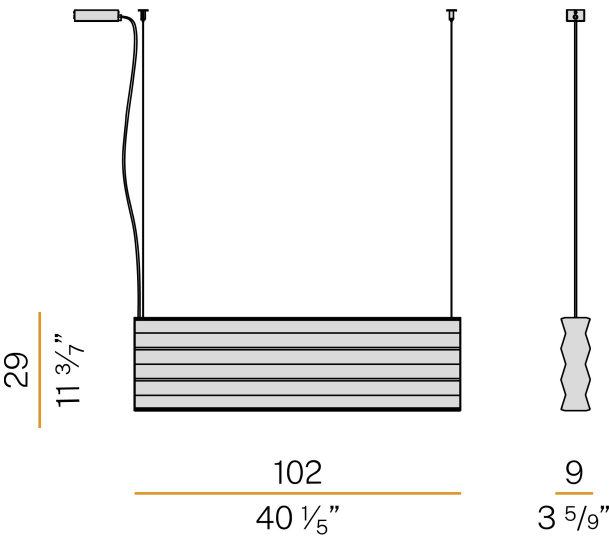

Polar diagram

