PANZERI

# Joe

220-240V AC
ST.XA2115

white

DIRECT LIGHT

## Data sheet

| | |
|---|---|
| CODE | ST.XA2115 |
| SYSTEM POWER CONSUMPTION | max 50W |
| LIGHT SOURCE | LED retrofit / halogen |
| LIGHT SOURCE KIT | not included |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| WEIGHT | 0,09 Kg |
| PROTECTION DEGREE | IP20 |
| PACKING DIMENSIONS | 10,0 x 8,0 x 10,0 cm |

Lighting fixture for ceiling built-in installation for interiors, with direct light emission.
Built-in structure for permanent false ceilings, in turned aluminium in white polyacrylic paint.
Light source retaining spring clip in stainless steel.
Stainless steel spring clips for false ceiling fixing.
Built-in hole dimension: Ø 75mm (Ø 3")

## Technical drawing

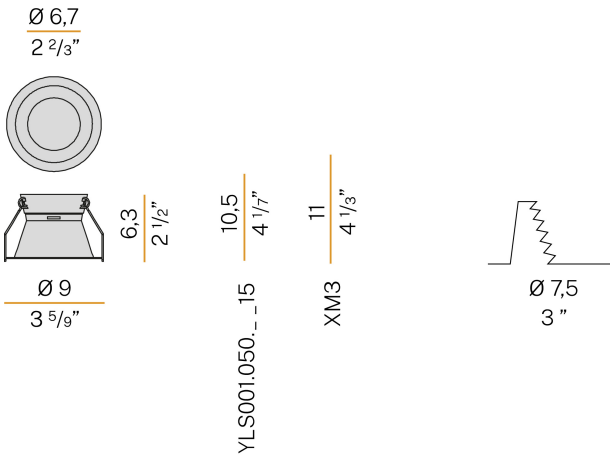


## Application

# Joe

## Accessories / source

YLS001.050.1715 LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.

YLS001.050.2515 LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.

YLS001.050.2915 LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.

# Joe

## Accessories / power supply

XM6-20 D/P MULTI

LED driver, 9,2÷20,4W 200÷900mA, 1-10V/DALI/Push DIM dimmable.




XM6-25 D/P MULTI

LED driver, 8,4÷25,6W 150÷900mA, DALI/Push DIM dimmable.




XM6/250/10

LED driver, 10W 250mA.