

# PANZERI

## Brooklyn Trim

24V DC


XG2034-50TRACK

 white/opal screen



### Data sheet

CODE	XG2034-50TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,32 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 65,0 cm
L (mm)	510
L (in)	20"
ADVISED BRACKETS	2
HOLE (mm)	515 x 40
HOLE (in)	20" x 1 3/8"

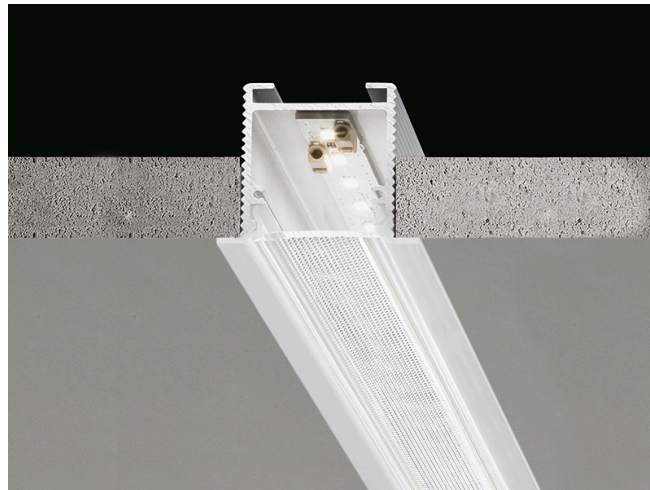

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.

Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.


Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 515x40mm (20,3x1,6")


### Technical drawing

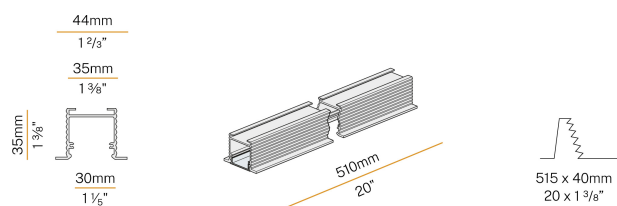

### Application



### Polar diagram

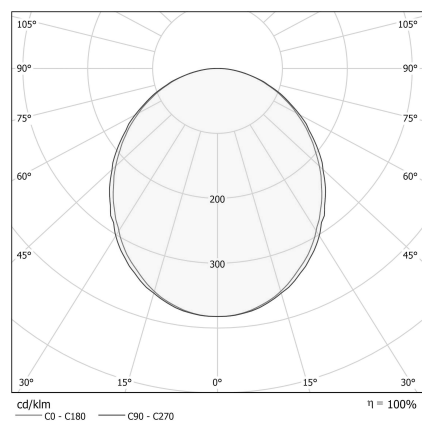

# PANZERI

## Brooklyn Trim

### Accessories / source

XM006.012.0410

LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM006.050.0410

LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



XM1ROW HD/5MT

Strip LED, 5000mm (197") 168 LED/m 17W/m 24V DC 3000K Ra>80 1964lm/m, to be cut each 42mm (1,7").



XM1ROW HD/5MT/2700K

Strip LED, 5000mm (197") 168 LED/m 17W/m 24V DC 2700K Ra>80 1964lm/m, to be cut each 42mm (1,7").



XM1ROW HD/5MT/4000K

Strip LED, 5000mm (197") 168 LED/m 17W/m 24V DC 4000K Ra>80 1964lm/m, to be cut each 42mm (1,7").



XM1ROW HF/5MT/2700K

Strip LED, 5000mm (197") 168 LED/m 10W/m 24V DC 2700K Ra>80 1200lm/m, to be cut each 42mm (1,7").



XM1ROW HF/5MT/3000K

Strip LED, 5000mm (197") 168 LED/m 10W/m 24V DC 3000K Ra>80 1200lm/m, to be cut each 42mm (1,7").



XM1ROW HF/5MT/4000K

Strip LED, 5000mm (197") 168 LED/m 10W/m 24V DC 4000K Ra>80 1200lm/m, to be cut each 42mm (1,7").



YLR001.022.0110

Strip LED, 5000mm (196,9") 160 LED/m 21,6W/m 24V DC 3000K Ra>80 3020lm/m, to be cut each 50mm (2").



# PANZERI

## Brooklyn Trim

### Accessories / power supply


XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.



XM120/24E

LED driver, 120W 24V DC.



XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.



XM180/24E

LED driver, 180W 24V DC.



XM30/24E

LED driver, 30W 24V DC.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.




XM6-20 UNI

LED driver, 4+20W 250-700mA.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




# PANZERI

## Brooklyn Trim

### Accessories / power supply

XM60/24E

LED driver, 60W 24V DC.



# PANZERI

## Brooklyn Trim

### Accessories / connection

---

XM2033/34/32/31-S

Power cables.



# PANZERI

## Brooklyn Trim

### Accessories / diffusion


XM2033/34-WHI

White reflector with 1000mm (39,4") length to be cut.




XM2033/34/45/46-1200S

Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.




XM2033/34/45/46-600S

Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-900S

Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.




# PANZERI

## Brooklyn Trim

### Accessories / fixing


XM2033/34-L

Pair of fixing plates for recessed installation in brick wall or concrete.




XM2033/34/38/39P

Plate for hanging.



XM2034-F

Drywall fixing bracket for recessed profiles.




# PANZERI

## Brooklyn Trim

### Accessories / junction

XM2033/34-ANG

Two profiles perpendicular junction with 45° cut.




XM2033/34-U

Linear junction.



XM2034-U90

Connection joint for two lines of modular profiles with level junction 90°, for built-in installation.





# PANZERI

## Brooklyn Trim

### Accessories / closing

---

XM2034-T

Pair of end caps with screws for recessed profiles.

