

Nolita Trim

220-240V AC ON-OFF
XG39E01.060.0401



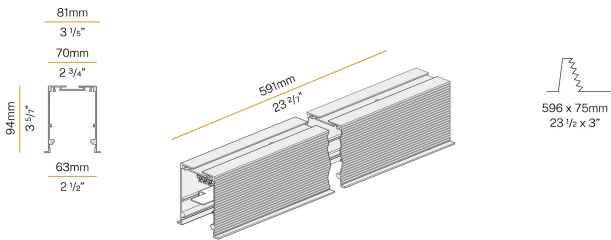
Data sheet

CODE	XG39E01.060.0401
SYSTEM POWER CONSUMPTION	16W
EFFICACY	54.13lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1744lm
LUMEN OUTPUT	866lm
EFFICIENCY	49.7%
WEIGHT	1,82 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	14,5 x 64,5 x 14,5 cm
L (mm)	591
L (in)	23 2/7"
ADVISED BRACKETS	2
HOLE (mm)	596 x 75
HOLE (in)	23 1/2" x 3"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.
Reflector retaining spring clips in stainless steel.
Aluminium reflector in RAL 9003 white polyacrylic paint.
Equipped with light modules and driver.
Extruded polycarbonate diffuser with opaline finish or micro-prismatic to be ordered separately.
Fastening, joining and closing accessories to be ordered separately.
Built-in hole dimension: 596x75mm (23,5x3")


Technical drawing



Application











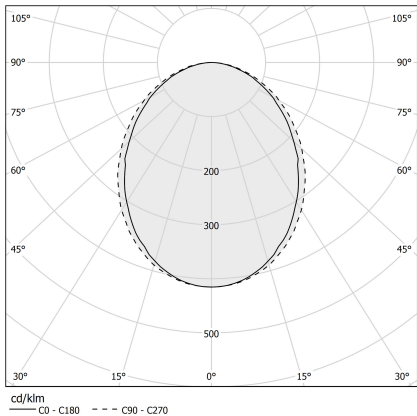
Polar diagram



PANZERI

Nolita Trim


Accessories / diffusion

XM2038/39-120S	Extruded polycarbonate diffuser with opaline finish, 1191mm (46,9") long.	
  		
XM2038/39-120S PR	Micro-prismatic extruded polycarbonate diffuser, 1191mm (46,9") long.	
  		
XM2038/39-150S	Extruded polycarbonate diffuser with opaline finish, 1491mm (58,7") long.	
  		
XM2038/39-150S PR	Micro-prismatic extruded polycarbonate diffuser, 1491mm (58,7") long.	
  		
XM2038/39-260S	Extruded polycarbonate diffuser with opaline finish, 2600mm (102,4") long.	
  		
XM2038/39-260S PR	Micro-prismatic extruded polycarbonate diffuser, 2600mm (102,4") long.	
  		
XM2038/39-380S	Extruded polycarbonate diffuser with opaline finish, 3800mm (149,6") long.	
  		
XM2038/39-380S PR	Micro-prismatic extruded polycarbonate diffuser, 3800mm (149,6") long.	
  		
XM2038/39-60S	Extruded polycarbonate diffuser with opaline finish, 591mm (23,3") long.	
  		


Nolita Trim

Accessories / diffusion


XM2038/39-60S PR Micro-prismatic extruded polycarbonate diffuser, 591mm (23,3") long.



XM2038/39-90S Extruded polycarbonate diffuser with opaline finish, 891mm (35,1") long.




XM2038/39-90S PR Micro-prismatic extruded polycarbonate diffuser, 891mm (35,1") long.





PANZERI

Nolita Trim

Accessories / fixing

XM2033/34/38/39P	Plate for hanging.	  	 
XM2038/39-L	Pair of fixing plates for recessed installation in brick walls or concrete.	  	 
XM2039-F	Drywall fixing bracket for recessed profiles.	  	

Accessories / junction

XG23901.L90.0401	Connection joint for two lines of modular profiles with 90° level junction, for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint. Aluminium reflector in RAL 9003 white polyacrylic paint. Joint plates in galvanized sheet metal. Equipped with light modules and driver. Extruded polycarbonate diffuser with opaline finish or micro-prismatic to be ordered separately.	
  		
XM2038/39-ANG	Two profiles perpendicular junction with 45° cut.	
  		
XM2038/39-U	Linear junction.	
  		
XM2039-U90	Connection joint for two lines of modular profiles with level junction 90°, for built-in installation.	
  		

Nolita Trim

Accessories / closing

XM2039-T

Pair of end caps with screws for recessed profiles.

