PANZERI

Jarvis

220-240V AC
XR13001.070.0000

white

DIRECT LIGHT

Data sheet

CODE	XR13001.070.0000
SYSTEM POWER CONSUMPTION	max 10W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,00 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm

Lighting fixture for ceiling built-in installation for interiors, with swivelling light beam.
Total built-in structure for permanent false ceilings, in die-cast aluminium in white powder paint.
Light source fastening ring rotating on two axes, in thermoplastic material.
Reflector in thermoplastic material with white finish.
Pickled sheet metal brackets for false ceiling fixing in powder paint.
Built-in hole dimension: Ø 73mm (Ø 2,9")

Technical drawing

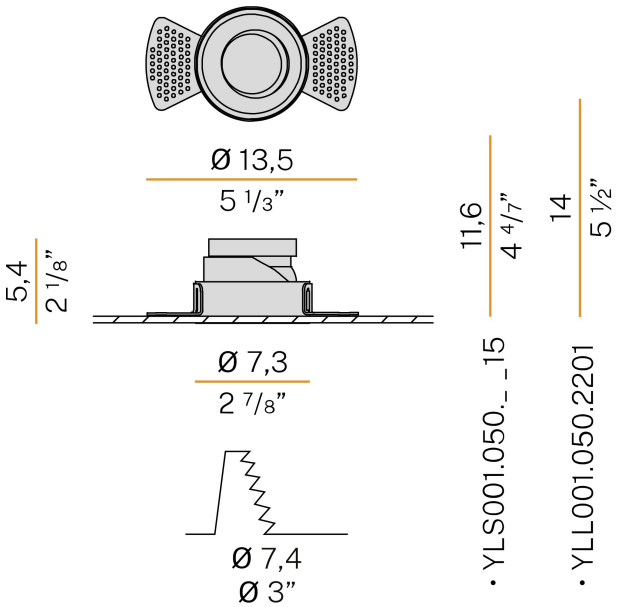

Application

PANZERI

Jarvis

Accessories / source

YLL001.050.2201 PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 680lm 60°, not dimmable.

YLS001.050.1715 LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.

YLS001.050.2515 LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.

YLS001.050.2915 LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.

PANZERI

Jarvis

Accessories / power supply

XM6-20 D/P MULTI

LED driver, 9,2÷20,4W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-25 D/P MULTI

LED driver, 8,4÷25,6W 150÷900mA, DALI/Push DIM dimmable.



XM6/250/10

LED driver, 10W 250mA.