PANZERI

Blanca

220-240V AC dimmable (DALI/Push DIM)
L05710.060.0402

glossy white

DIRECT + INDIRECT LIGHT

Data sheet

CODE	L05710.060.0402
SYSTEM POWER CONSUMPTION	70W
EFFICACY	66.49lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	8346lm
LUMEN OUTPUT	4654lm
EFFICIENCY	55.8%
WEIGHT	3,90 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	69,0 x 69,0 x 34,0 cm

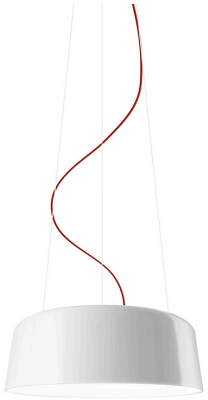

Suspension lighting fixture for interiors, with direct and indirect light emission.
Turned aluminium reflector in glossy white or metallized brown polyacrylic paint.
Moulded acrylic diffuser with opaline finish.
2m (78,7") long steel suspension cables.
2,2m (86,6") long PVC power cable with red fabric covering.
Power canopy with pickled sheet metal ceiling bracket and covering in glossy white or metallized brown polyacrylic paint.

Technical drawing

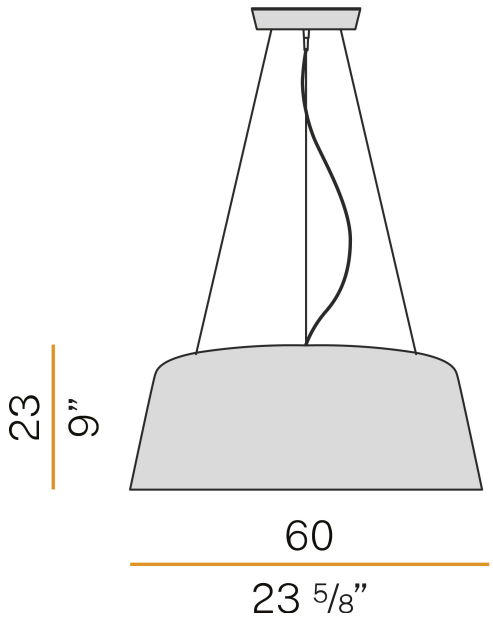
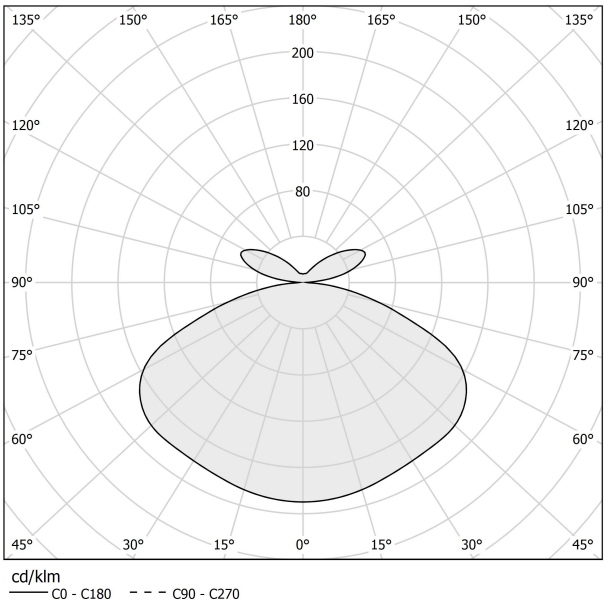
Polar diagram